




500 SERIES

Standard-Duty Grade 3 Surface Applied Closers

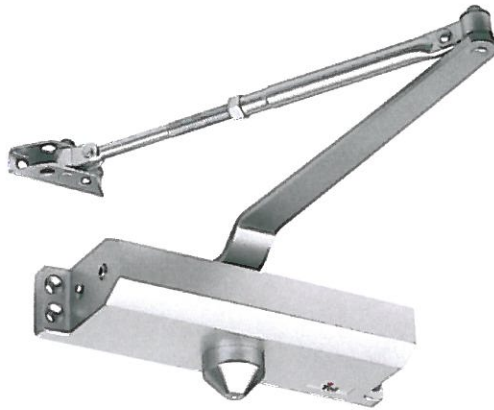

Standard Features

- **Performance** Complies with ANSI A156.4, Grade 3, 500,000 cycles, UL listed
- **Chassis/Closer** Non-handed, cast aluminum, mounting to regular, top jamb or parallel arm applications
- **Main Arm** Stamped steel, accommodates reveals up to 3 1/4", adjustable extension arm
- **Spring Power** Adjustable 1 - 4 sizes
- **Backcheck** Adjustable, hydraulic - providing cushioning and preventing uncontrolled openings of the door
- **Valves** Adjustable, independent, non-critical (sweep and latch), consistent closing speeds
- **Fasteners** Compatible for aluminum, hollow metal and wood doors and frames
- **Door Range** Up to 180 degrees
- **Door Preparation** 9-1/16" horizontal and 3/4" vertical mounting hole locations (retrofits traditional closer)
- **Warranty** 10 year limited