




9400 SERIES

Heavy-Duty Commercial Grade 1 Architectural Surface Vertical Rod Exit Device

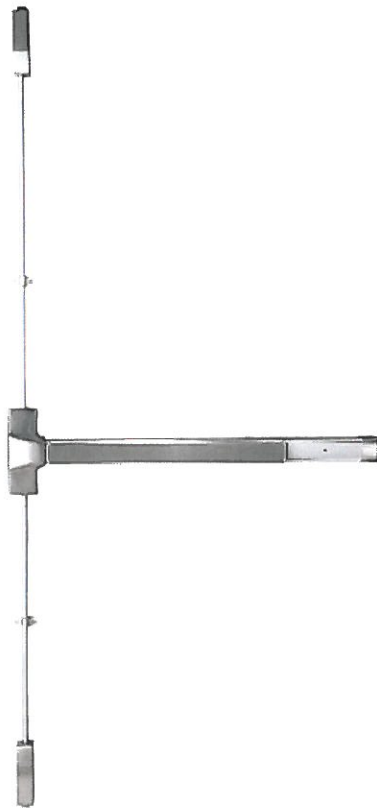

Standard Features

- **Performance** Complies with ANSI A156.3, 2001, Grade 1, UL Listed
- **Rail** Fits 30" to 36" doors
- **Latch** Stainless steel 5/8" throw with deadlatch feature
- **Backset** 2-3/4"
- **Strikes** Adjustable with slotted holes for adjustments
- **Fasteners** Accommodates wood and metal doors with thru bolts standard
- **Door Range** 1-3/4" to 2-1/4" thick
- **Door Preparation** Surface mounted and covers 161 prep
- **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
- **Warranty** 10 years

Optional Features

- **Fire Rated** Fire Rated device available for use on doors rated up to 3 hours. Fire Rated device also available for larger doors up to a maximum of 4' x 8'. Specify when ordering.
- **Wide Rail** Fits up to 48" doors
- **Trim** Lever trim. (Prep for keyed cylinder).
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)