

GRADE 2 LOCKSETS



LT2000 Light-Duty Tubular Grade 2 Leversets

KT2100 Light-Duty Tubular Grade 2 Knobsets

LC2200 Standard-Duty Cylindrical Grade 2 Leversets

KC2300 Heavy-Duty Commercial Grade 2 Knobsets

LC2400 Heavy-Duty Cylindrical Grade 2 Leversets

LC2600 Standard-Duty Cylindrical Grade 2 Leversets

LC2700 Standard-Duty Cylindrical Grade 2 Interconnected Leversets

CORPORATE OFFICE: 18 Richard Drive, Lilitz, PA 17543

TOLL FREE: 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: Houston, Texas Elkhart, Indiana Mira Loma, California

WEBSITE: www.tellmfg.com



LT2000 SERIES

Light-Duty Tubular Grade 2 Leversets

Standard Features


- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Tubular, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed, solid cast
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw 3" diameter
- **Rose** Adjustable 2-3/4" or 2-3/8"
- **Backset** Adjustable 2-3/4" or 2-3/8"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features

- **Strike** T Strike (1-1/8" x 2-3/4"), and F Strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keying Options** ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN. Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

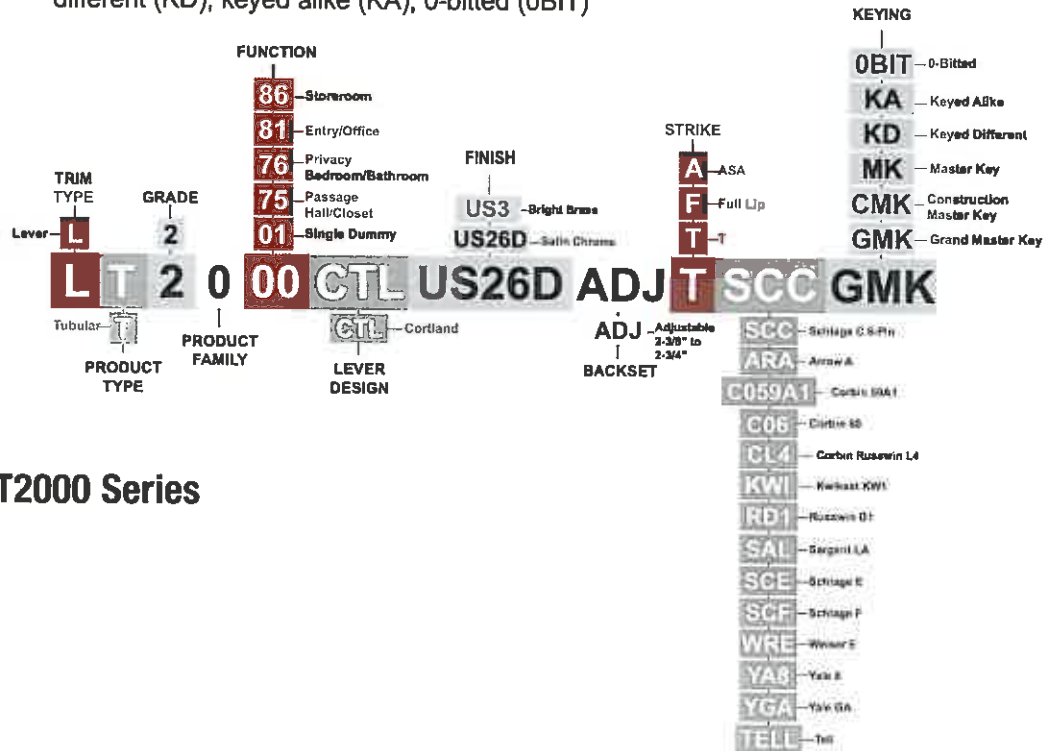

How to Order LT2000 Series

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.



KT2100 SERIES

Light-Duty Tubular Grade 2 Knobsets

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, UL Listed for 3 hour fire door
- **Chassis** Tubular type construction, non-handed
- **Latch** 1" x 2-1/4", square corner, 3/4" housing diameter, 1/2" throw
- **Rose** 3" diameter
- **Backset** Adjustable 2"-3/8" - 2" 3/4"
- **Strike** Square corner, 1-1/4" x 4-7/8"
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1"-3/8" to 1-3/4"
- **Door Preparation** 2"-1/8" hole x 1" latch hole fits standard 161 door prep
- **Warranty** 1 year limited

Optional Features


- **Latch** 1"-1/8" x 2"x1/4", square corner faceplate, 7/8" housing diameter, 1/2" throw (fits 161 door prep)
- **Strike** T strike (1"-1/8" x 2"-3/4") and F strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.

How to Order KT2100 Series

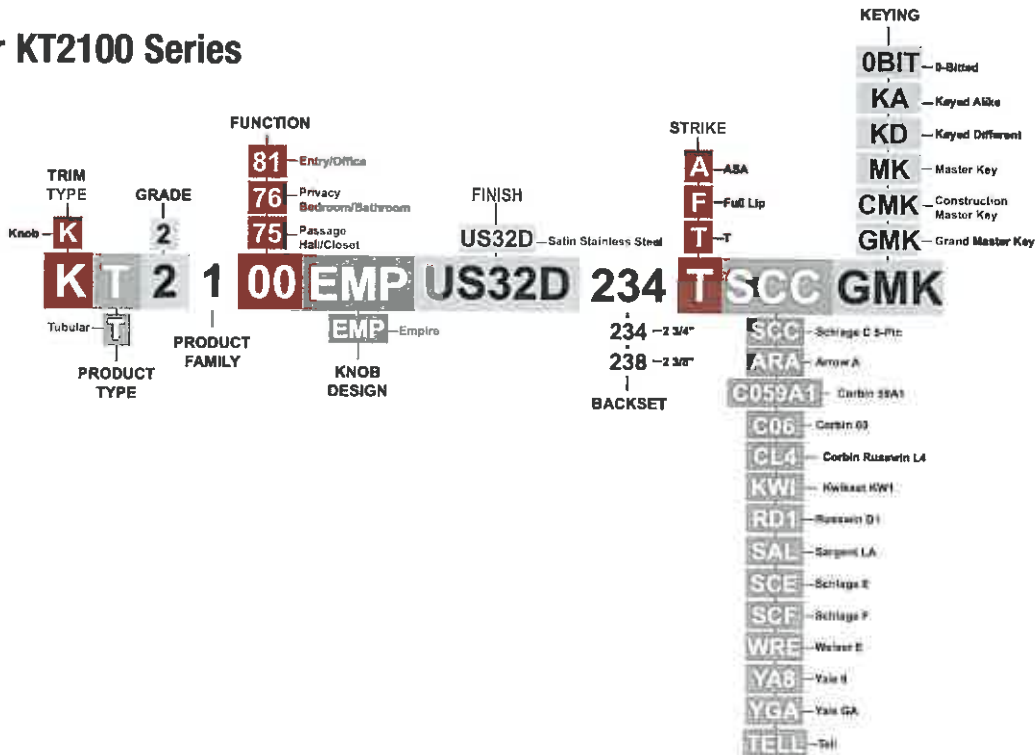

KEYWAY CYLINDER*
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.



LC2200 SERIES

Standard-Duty Cylindrical Grade 2 Leversets

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, ANSI A117.1 accessibility (ADA) code, UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel-coated w/ zinc dichronate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1"-1/8" x 2"-1/4", square corner faceplate, 3/4" housing, 1/2" throw (stainless steel)
- **Rose** 3" diameter
- **Backset** 2"-3/8" or 2-3/4"
- **Strike** Square corner 1"-1/4" x 4"-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock lock
- **Door Range** 1"-3/8" to 2"
- **Door Preparation** 2"-1/8" diameter for bore, 1" diameter latch bore. Fits standard 161 door prep.
- **Warranty** 1 year limited


Optional Features

- **Strike** T Strike (1"-1/8" x 2"-3/4"), and F Strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (OBIT)

How to Order LC2200 Series

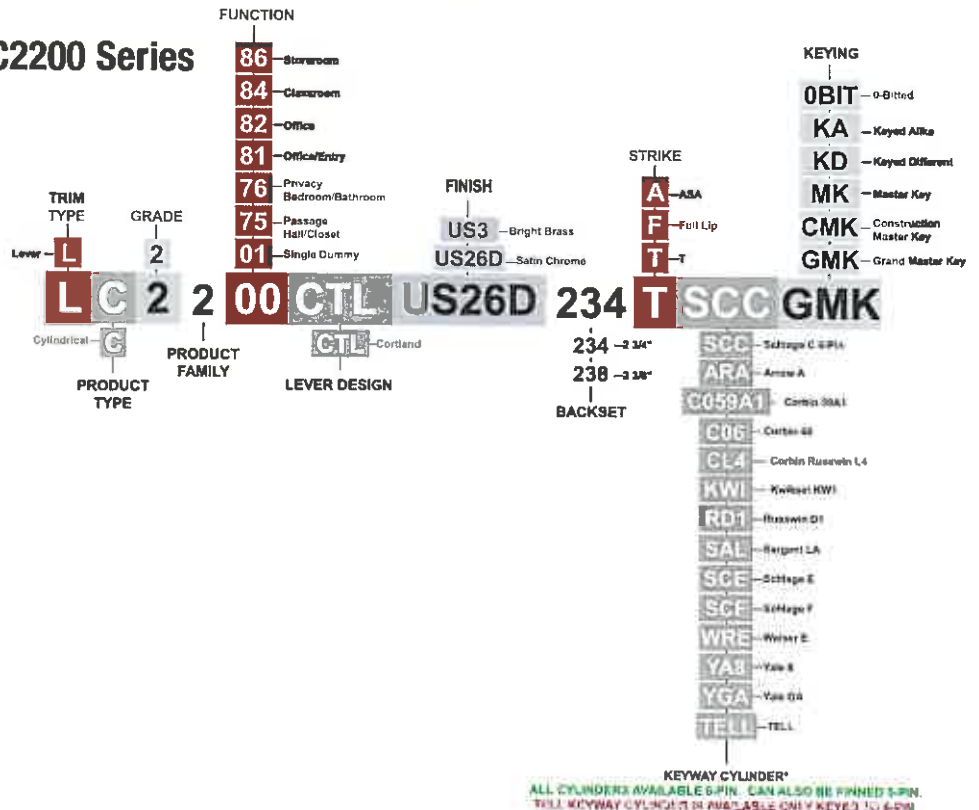

ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

KC2300 SERIES

Heavy-Duty Cylindrical Grade 2 Knobsets



Tell Manufacturing, Inc.
COMMERCIAL DOOR HARDWARE

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 1-3/4"
- **Door Preparation** 2-1/8" diameter for knob, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited


Optional Features

- **Backset** 2-3/8"
- **Strike** T Strike (1-1/8" x 2-3/4"), and F Strike (full lip)


Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

How to Order KC2300 Series

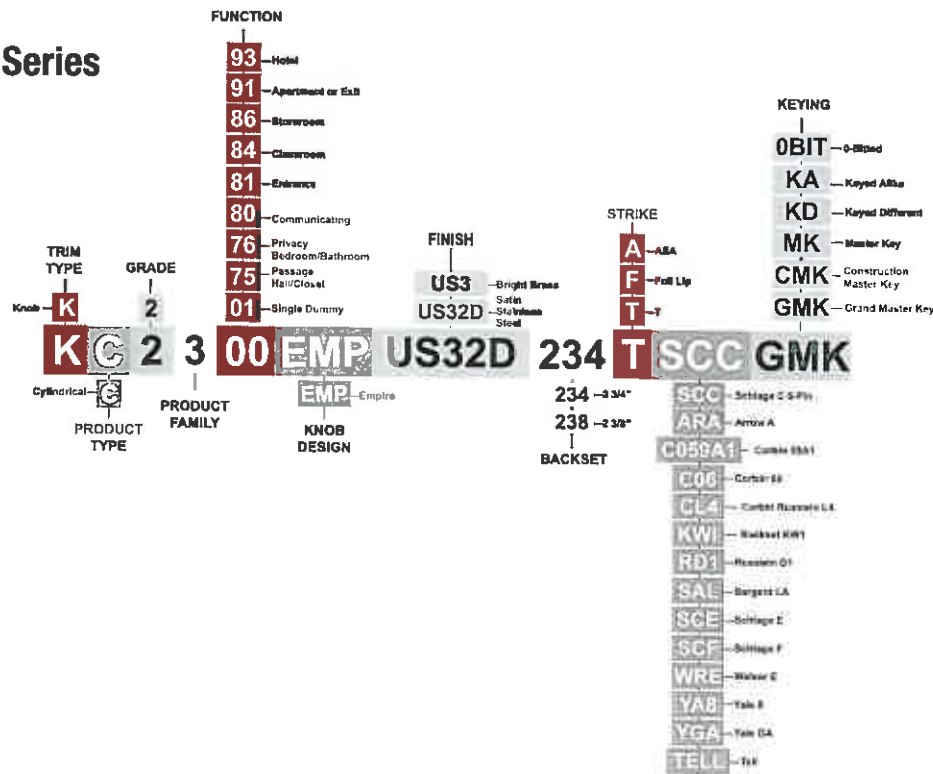

KEYWAY CYLINDER
ALL CYLINDERS AVAILABLE 6-PIN CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

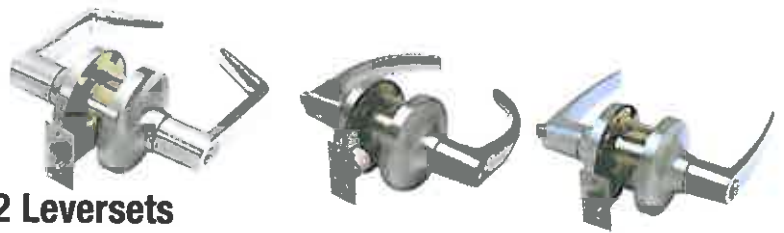

LC2400 SERIES

Heavy-Duty Commercial Grade 2 Leversets

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 1, (800,000 cycles), UL listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance), freewheeling clutch (added security from hammer attacks), independent spring cages
- **Lever** Non-handed, solid cast
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3-1/2" diameter
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Cylinder** Other manufacturers including small format interchangeable cores
- **Door Range** 1-3/8" - 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latchbolt. Fits standard 161 door prep with through-bolting through the door.
5 year limited

Optional Features

- **Strike**

T Strike (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder**

Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).

- **Other Cylinder Options**

Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)

ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.


- **IC Keyway Cylinder AVAILABLE 6- OR 7-PIN**

Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)

- **Keying Options**

Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

How To Order LC2400 Series

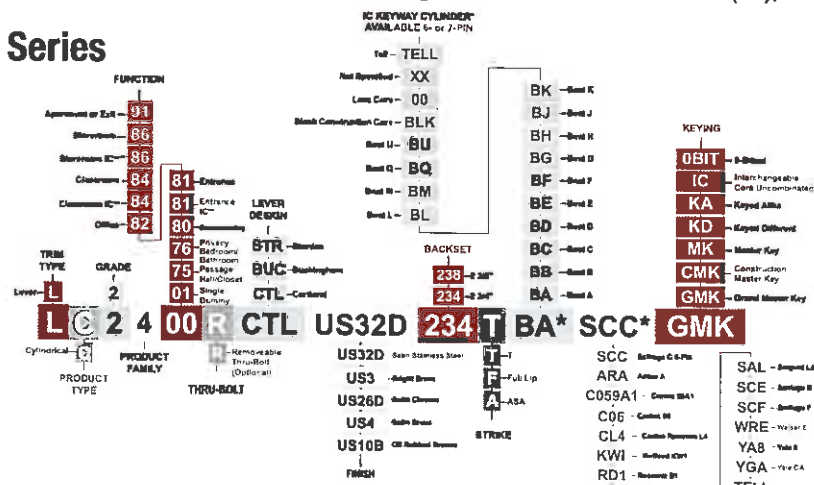

* Choose one keyway format, either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER
 - IC functions in Brass Chrome (26D) only

NON-IC KEYWAY CYLINDER*
 ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
 TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

Tell Manufacturing, Inc. COMMERCIAL DOOR HARDWARE

LC2600 SERIES

Standard-Duty Cylindrical Grade 2 Leversets



Tell Manufacturing, Inc.
COMMERCIAL DOOR HARDWARE

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, ANSI A117.1 accessibility (ADA) code, UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel-coated w/ zinc dichronate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4" square corner faceplate, 3/4" housing, 1/2" throw (stainless steel)
- **Rose** 3-1/4" diameter
- **Thru-bolts** Removable thru-bolts standard
- **Backset** 2-3/8" or 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter latch bore. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features


- **Chassis** Freewheeling clutch
- **Strike** T Strike (1-1/8" x 2-3/4"), and F Strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available only keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.

How to Order LC2600 Series

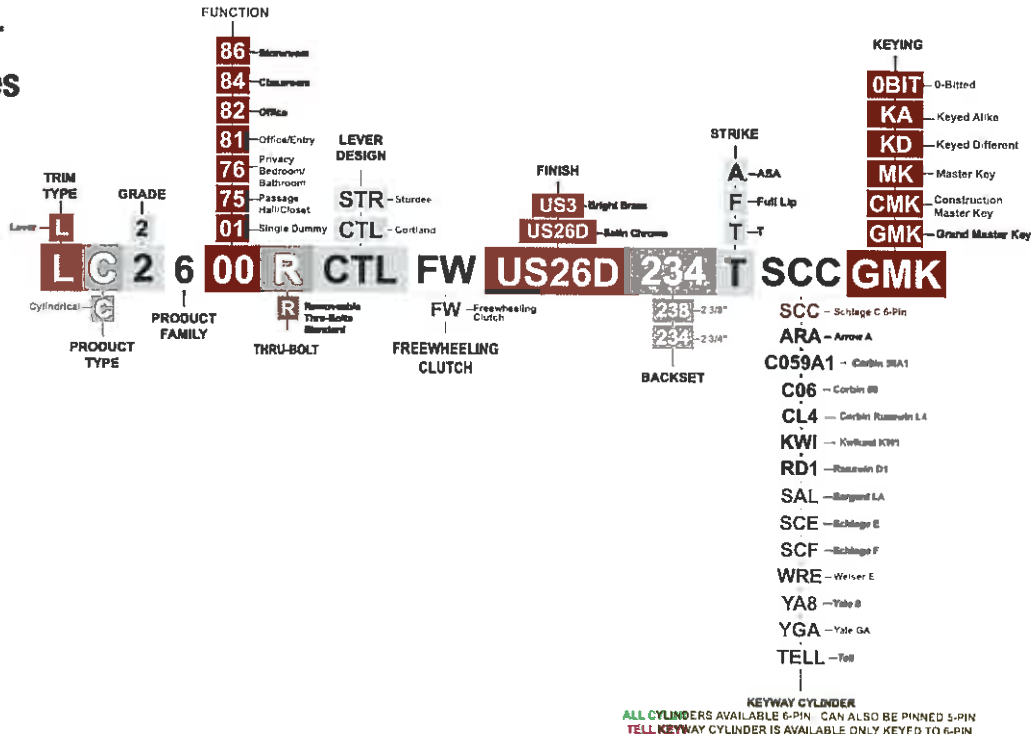



LC2700 SERIES

Standard-Duty Cylindrical Grade 2 Interconnected Leversets

Standard Features


- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door ADA code compliant
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 3/4" housing diameter, 1/2" throw (stainless steel)
- **Backset** 2-3/4"
- **Strike** 2-3/4" x 1-1/8" standard T-strike. Optional strikes available.
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 1-3/4" door thickness
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for latch bore. Fits standard 161 door prep, 4" centers.
- **Warranty** 1 year limited

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

How to Order LC2700 Series

Tell Part Number: CL100850

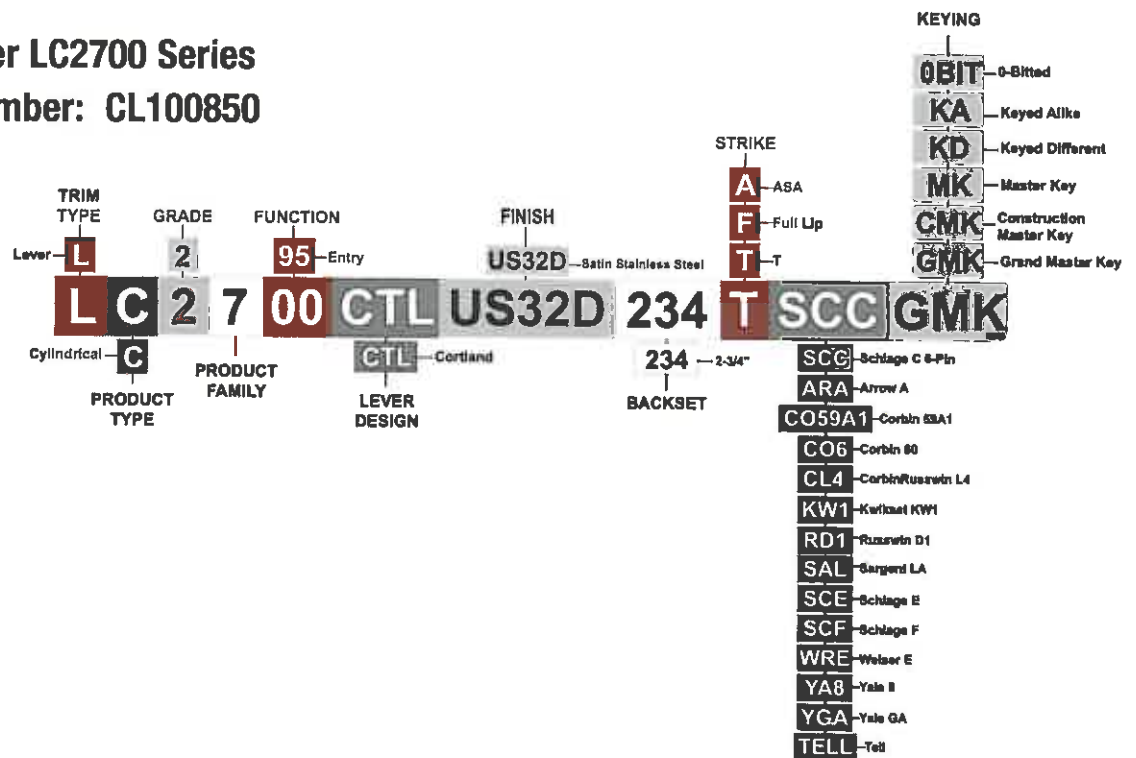

Tell Manufacturing, Inc.
COMMERCIAL DOOR HARDWARE