



LT2000 SERIES

Light-Duty Tubular Grade 2 Leversets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
- **Chassis** Tubular, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed, solid cast
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** Adjustable 2-3/4" or 2-3/8"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features

- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

TELL MANUFACTURING, INC — Page 13 — 2012











CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 **TOLL FREE:** 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



LT2000 Series Function Chart


FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by turn button from inside ■ Unlocked by key from outside or rotating inside lever 	F82
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside lever or key in outside lever ■ Outside lever always fixed 	F86
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever 	F76
Passage Hall/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull lever one side ■ No mechanical operation 	



LT2000 Series Latches

CL100506

Drive-in latch, non-dead latching, used where face plate not required. 1/2" required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100505

Drive-in latch, dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100504, US32D

U.L. listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100503, US32D

U.L. listed latch bolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



LT2000 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



LT2000 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LT2000 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —

6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

TELL MANUFACTURING, INC — Page 15 — 2012


CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order LT2000 Series

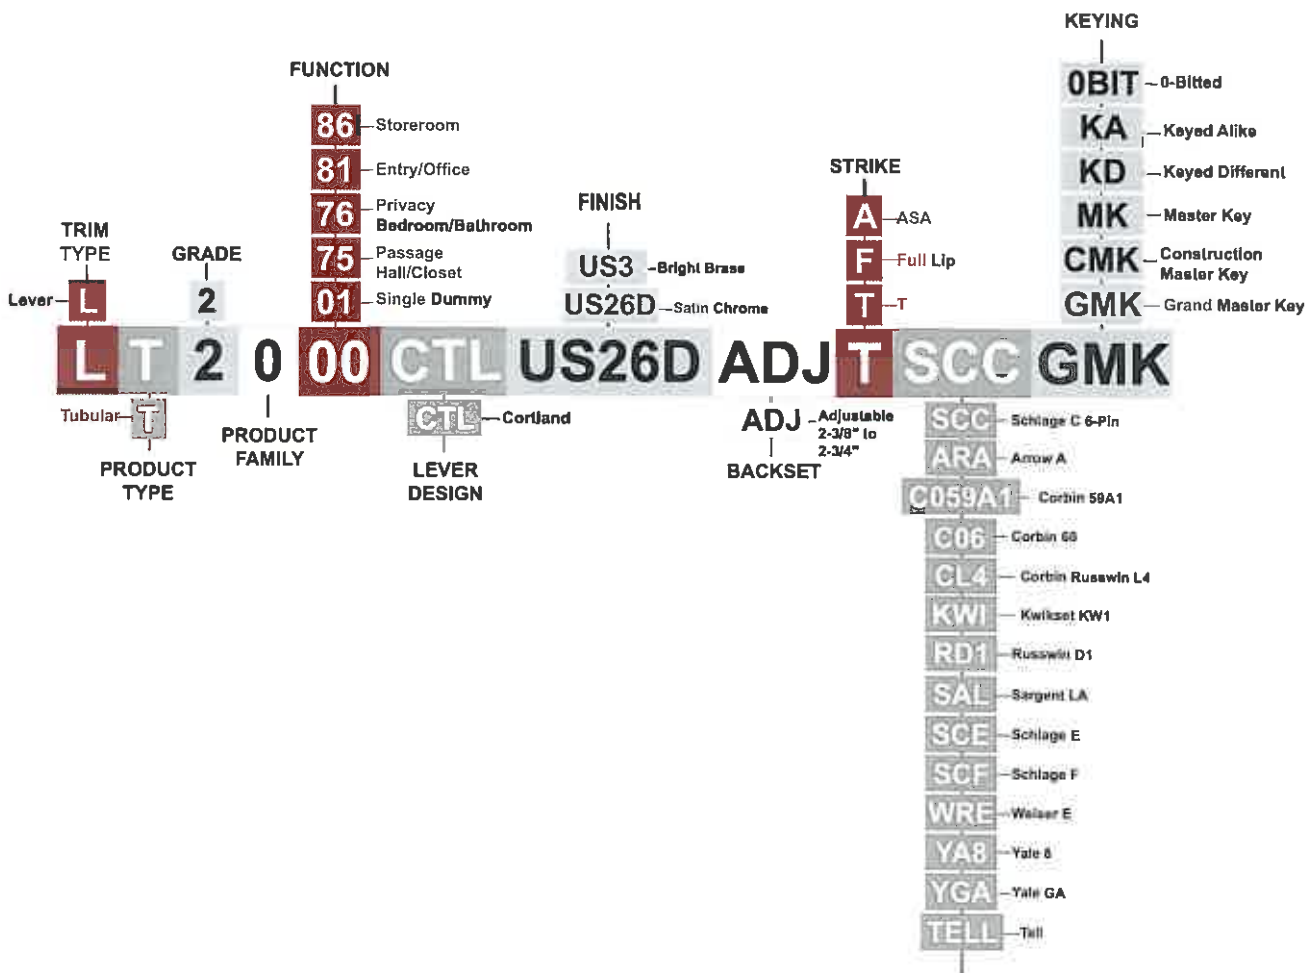

KEYWAY CYLINDER
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.



KT2100 SERIES

Light-Duty Tubular Grade 2 Knobsets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, UL Listed for 3 hour fire door
- **Chassis** Tubular type construction, non-handed
- **Latch** 1" x 2-1/4", square corner, 3/4" housing diameter, 1/2" throw
- **Rose** 3" diameter
- **Backset** Adjustable 2"-3/8" - 2"-3/4"
- **Strike** Square corner, 1-1/4" x 4-7/8"
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1"-3/8" to 1-3/4"
- **Door Preparation** 2"-1/8" hole x 1" latch hole fits standard 161 door prep
- **Warranty** 1 year limited

Optional Features

- **Latch** 1"-1/8" x 2"x1/4", square corner faceplate, 7/8" housing diameter, 1/2" throw (fits 161 door prep)
- **Strike** T strike (1"-1/8" x 2"-3/4") and F strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

TELL MANUFACTURING, INC. — Page 17 — 2012




CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 **TOLL FREE:** 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



KT2100 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> Deadlocking latch bolt operated by knob from either side except when outside knob is locked by push button or other locking device on inside. When outside knob is locked, operating key in outside knob or operating inside knob unlocks push button or other locking device and retracts latch bolt. Closing door does not release push button or other locking device. 	F82
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> Latchbolt operated by knob from either side Outside knob locked by push button on inside Unlocked by emergency release on outside, rotating inside knob 	F76
Passage/Hall Closet	75			<ul style="list-style-type: none"> Latchbolt operated by knob from either side at all times 	F75

ACCESSORIES



KT2100 Series Latches

CL100506

Drive-in latch, non-dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100505

Drive-in latch, dead latching, used where face plate not required. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



CL100504, US32D

U.L. listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100503, US32D

U.L. listed latch bolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4". Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



KT2100 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").



CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").



CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



KT2100 Series Non-Restricted Keyway

CL100219 —

Cylinder, Schlage C, US26D

CL100584 —

Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



KT2100 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —

6 pin Tell cylinder, US26D

CL101504 —

6 pin Tell cylinder, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

TELL MANUFACTURING, INC — Page 19 — 2012


CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order KT2100 Series

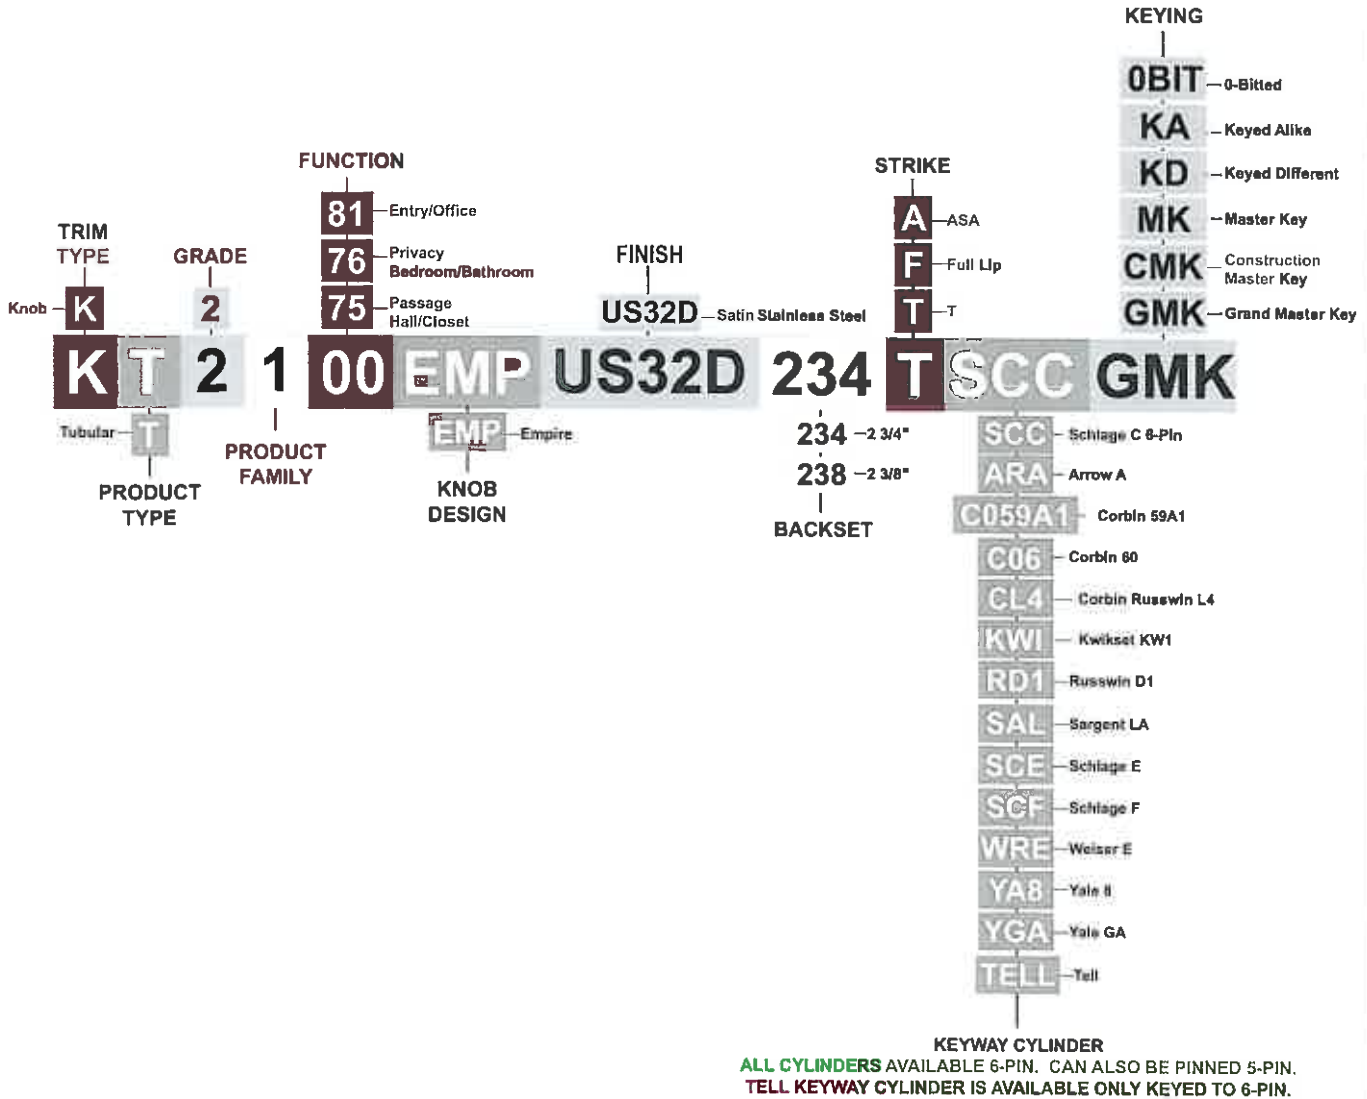



LC2200 SERIES

Standard-Duty Cylindrical Grade 2 Leversets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, ANSI A117.1 accessibility (ADA) code, UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel-coated w/ zinc dichronate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1"-1/8" x 2"-1/4", square corner faceplate, 3/4" housing, 1/2" throw (stainless steel)
- **Rose** 3" diameter
- **Backset** 2"-3/8" or 2-3/4"
- **Strike** Square corner 1"-1/4" x 4"-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock lock
- **Door Range** 1"-3/8" to 2"
- **Door Preparation** 2"-1/8" diameter for bore, 1" diameter latch bore. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features

- **Strike** T Strike (1"-1/8" x 2"-3/4"), and F Strike (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

TELL MANUFACTURING, INC — Page 21 — 2012















CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 **TOLL FREE:** 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



LC2200 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by turn button from inside ■ Unlocked by key from outside or rotating inside lever 	F82
Entry	82			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button from inside ■ Outside unlocked by key from outside or rotating inside lever 	F82
Classroom	84			<ul style="list-style-type: none"> ■ Latchbolt operated by knob from each side ■ Outside knob locked or unlocked by key from outside ■ Inside knob always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside lever or key in outside lever ■ Outside lever always fixed 	F86
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull lever one side ■ No mechanical operation 	

ACCESSORIES



LC2200 Series Latches

CL100193 —
2-3/4" Guarded, US26D

CL100194 —
2-3/4" Unguarded, US26D

CL100195 —
2-3/8" Unguarded, US26D

CL100518 —
2-3/8" Guarded, US26D

Drive-in latch, used where face plate not required available in 2-3/8" and 2-3/4" backset. 1/2" throw, 1" diameter body.



CL100214 —
2-3/4" Unguarded, US32D

CL100216 —
2-3/8" Unguarded, US32D

CL100210 —
2-3/4" Unguarded, US3

CL100211 —
2-3/8" Unguarded, US3

UL listed latch bolt with non-deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100213 —
2-3/4" Guarded, US32D

CL100212 —
2-3/8" Guarded, US32D

CL100209 —
2-3/4" Guarded, US3

CL100251 —
2-3/8" Guarded, US3

UL listed latch bolt with deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



LC2200 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").

CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").

CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



LC2200 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



LC2200 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

TELL MANUFACTURING, INC. — Page 23 — 2012


CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 **TOLL FREE:** 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order LC2200 Series

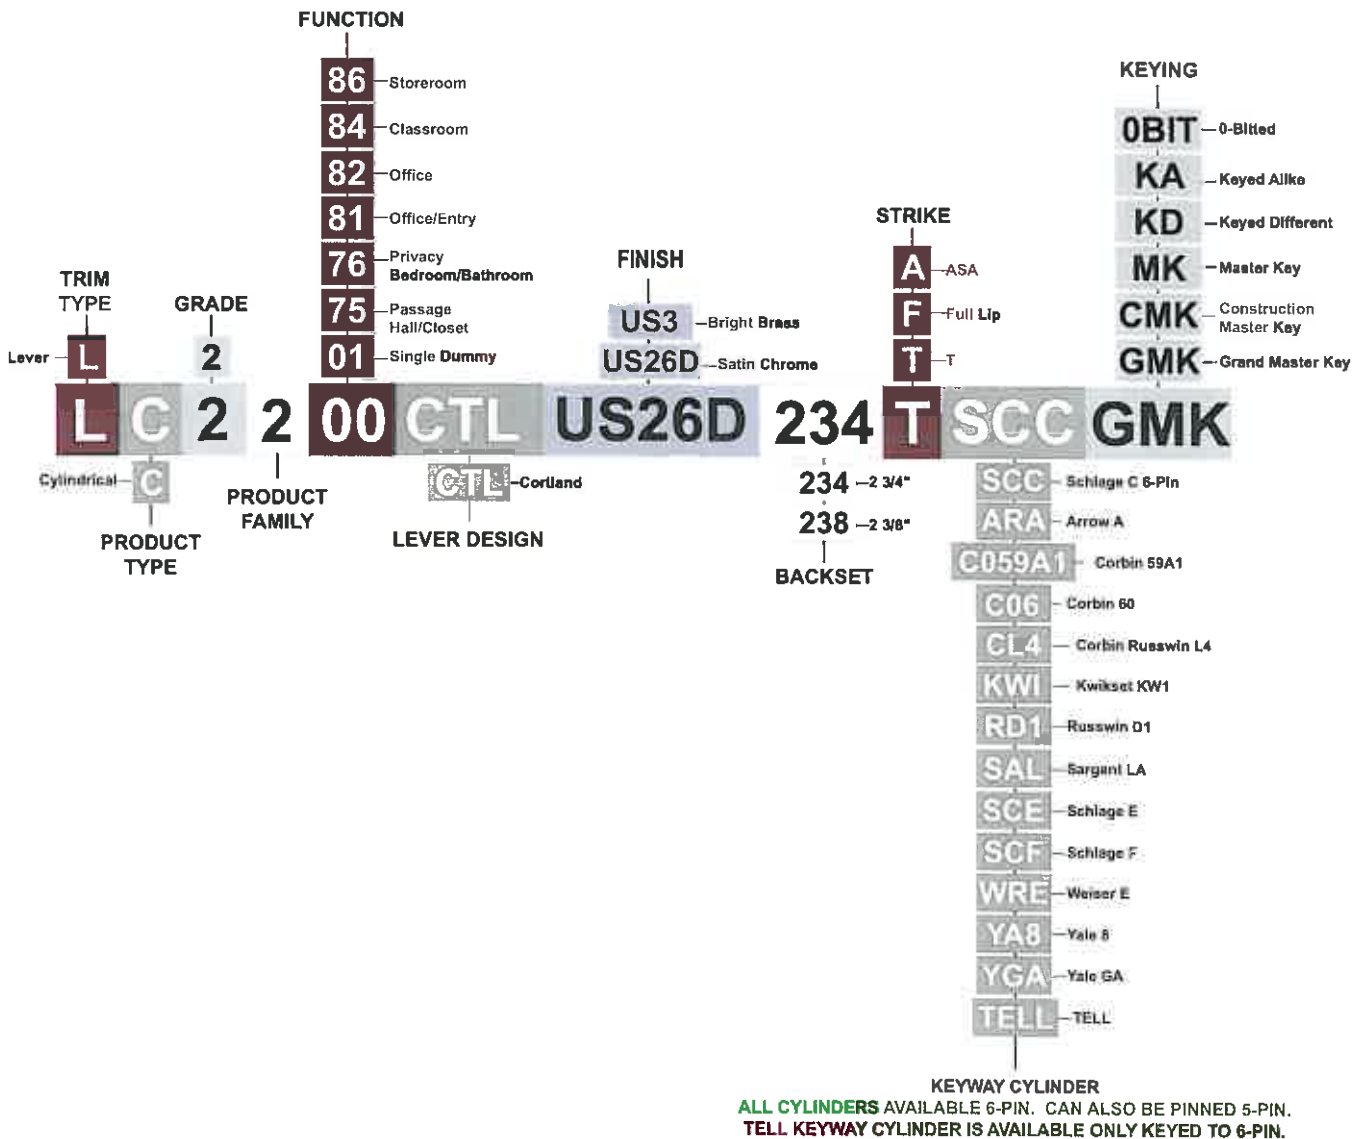



KC2300 SERIES

Heavy-Duty Cylindrical Grade 2 Knobsets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
- **Rose** 3" diameter
- **Backset** 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock cylinder
- **Door Range** 1-3/8" to 1-3/4"
- **Door Preparation** 2-1/8" diameter for knob, 1" diameter for latch bolt. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features

- **Backset** 2-3/8"
- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

TELL MANUFACTURING, INC — Page 25 — 2012

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095
 OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA
 WEBSITE: www.tellmfg.com



KC2300 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> ▪ Latchbolt operated by knob from either side ▪ Outside knob locked by push button from inside ▪ Unlocked by key from outside or rotating inside knob ▪ When outside knob locked by push and turn button from inside, key from outside or rotating inside knob retracts latch, does not unlock outside knob 	F81
Classroom	84			<ul style="list-style-type: none"> ▪ Latchbolt operated by knob from each side ▪ Outside knob locked or unlocked by key from outside ▪ Inside knob always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> ▪ Latch operated by rotating inside knob or key in outside knob ▪ Outside knob always fixed 	F86
Apartment or Exit	91			<ul style="list-style-type: none"> ▪ For office or apartment building entrance doors or lavatory doors ▪ Deadlocking latchbolt ▪ Either lever operates latchbolt ▪ Key in outside lever operates latchbolt ▪ Should be used only in offices or rooms with multiple entries 	F88
Hotel	93			<ul style="list-style-type: none"> ▪ Deadlocking latchbolt ▪ Rigid outside, active inside knob ▪ Latchbolt retracted by key or rotating inside knob ▪ Push button on inside knob projects occupancy indicator on face of cylinder plug, shuts out all keys except emergency or display keys ▪ Push button is released by turning inside knob or closing door ▪ Inserted emergency or display key rotated left, fixes pushbutton in locked position, shuts out all other keys 	F93
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ▪ Latchbolt operated by knob from either side ▪ Outside knob locked by push button on inside ▪ Unlocked by emergency release on outside, rotating inside knob, or closing door 	F76
Passage/Closet	75			<ul style="list-style-type: none"> ▪ Latchbolt operated by knob from either side at all times 	F75
Communicating	80			<ul style="list-style-type: none"> ▪ Latchbolt operated by knob from one side at all times 	F80
Single Dummy	01			<ul style="list-style-type: none"> ▪ Pull knob one side ▪ No mechanical operation 	

ACCESSORIES



KC2300 Series Latches

CL100193 —
2-3/4" Guarded, US26D

CL100194 —
2-3/4" Unguarded, US26D

CL100195 —
2-3/8" Unguarded, US26D

CL100518 —
2-3/8" Guarded, US26D

Drive-in latch, used where face plate not required available in 2-3/8" and 2-3/4" backset. 1/2" throw, 1" diameter body.



CL100214 —
2-3/4" Unguarded, US32D

CL100216 —
2-3/8" Unguarded, US32D

CL100210 —
2-3/4" Unguarded, US3

CL100211 —
2-3/8" Unguarded, US3

UL listed latch bolt with non-deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



CL100213 —
2-3/4" Guarded, US32D

CL100212 —
2-3/8" Guarded, US32D

CL100209 —
2-3/4" Guarded, US3

CL100251 —
2-3/8" Guarded, US3

UL listed latch bolt with deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



KC2300 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").

CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").

CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



KC2300 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



KC2300 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

TELL MANUFACTURING, INC — Page 27 — 2012


CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 **TOLL FREE:** 800-433-4047 **PHONE:** 717-625-2990 **FAX:** 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order KC2300 Series

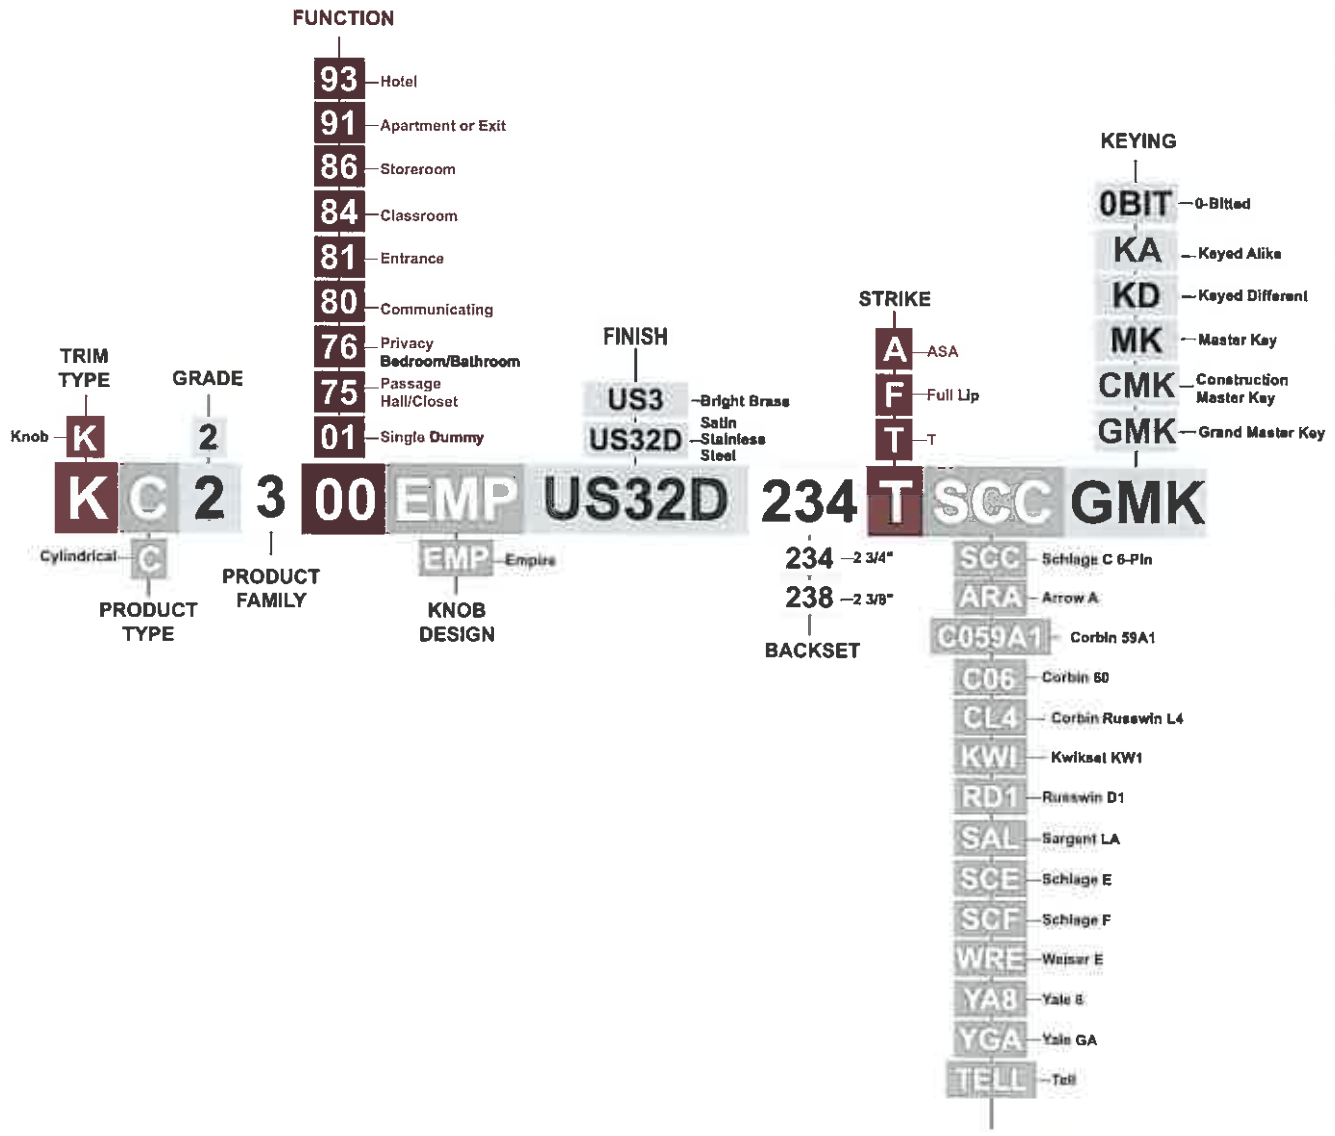

KEYWAY CYLINDER
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

LC2400 SERIES



Heavy-Duty Cylindrical Grade 2 Leversets



Cortland (CTL)



Buckingham (BUC)



Sturdee (STR)

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door ANSI A117.1 American Disabilities Act (ADA)
 - **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance), freewheeling clutch (added security from hammer attacks), independent spring cages
 - **Lever** Non-handed, solid cast
 - **Latch** 1-1/8" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1/2" throw
 - **Rose** 3-1/2" diameter
 - **Thru-bolts** Thru-bolts standard. Removable available.
 - **Backset** 2-3/4"
 - **Strike** Square corner 1-1/4" x 4-7/8" ANSI **ASA Strike**
 - **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
 - **Keys** Two nickel silver per lock cylinder
 - **Cylinder** Other manufacturers including small format interchangeable cores
 - **Door Range** 1-3/8" - 2"
 - **Door Preparation** 2-1/8" diameter for lever, 1" diameter for latchbolt. Fits standard 161 door prep with through-bolting through the door.
1 year limited
- ### Optional Features
- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)
 - **Backset** 2-3/8"
- ### Keying Options
- **Tell Cylinder** Restricted Tell keyway cylinder can key both the cylinder and interchangeable core in one lock. The cylinders and IC cores are interchangeable. Tell keyway cylinder is available **only** keyed to 6-pin. Tell IC cylinder can be keyed to 6-pin or 7-pin interchangeable core (IC).
 - **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
 - **IC Keyway Cylinder** Tell, Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
 - **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)



LC2400 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button from inside Unlocked by key from outside or rotating inside lever When outside lever locked by push and turn button from inside, key from outside or rotating inside lever retracts latch, does not unlock outside lever 	F81
Office	82			<ul style="list-style-type: none"> Deadlocking latch bolt operated by lever from either side except when outside lever is locked by push button or other locking device on inside. When outside lever is locked, operating key in outside lever or operating inside lever unlocks push button or other locking device and retracts latch bolt. Closing door does not release push button or other locking device. 	
Classroom	84			<ul style="list-style-type: none"> Latchbolt operated by lever from each side Outside lever locked or unlocked by key from outside Inside lever always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> Latch operated by rotating inside lever or key in outside lever Outside lever always fixed 	F86
Apartment or Exit	91			<ul style="list-style-type: none"> For office or apartment building entrance doors or lavatory doors Deadlocking latchbolt Either lever operates latchbolt Key in outside lever operates latchbolt Should be used only in offices or rooms with multiple entries 	F88
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> Latchbolt operated by lever from either side Outside lever locked by push button on inside Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage Hall/Closet	75			<ul style="list-style-type: none"> Latchbolt operated by lever from either side at all times 	F75
Communicating	80			<ul style="list-style-type: none"> Latchbolt operated by lever from one side at all times 	F80
Single Dummy	01			<ul style="list-style-type: none"> Pull lever one side No mechanical operation 	

ACCESSORIES

LG2400 Series Latches



- CL100193 —
2-3/4" Guarded, US26D
- CL100194 —
2-3/4" Unguarded, US26D
- CL100195 —
2-3/8" Unguarded, US26D
- CL100518 —
2-3/8" Guarded, US26D

Drive-in latch, used where face plate not required available in 2-3/8" and 2-3/4" backset. 1/2" throw, 1" diameter body.



- CL100214 —
2-3/4" Unguarded, US32D
- CL100216 —
2-3/8" Unguarded, US32D
- CL100210 —
2-3/4" Unguarded, US3
- CL100211 —
2-3/8" Unguarded, US3

UL listed latch bolt with non-deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



- CL100213 —
2-3/4" Guarded, US32D
- CL100212 —
2-3/8" Guarded, US32D
- CL100209 —
2-3/4" Guarded, US3
- CL100251 —
2-3/8" Guarded, US3

UL listed latch bolt with deadlatching function. 1/2" throw. 2-3/8" and 2-3/4" backset available. Fits 160 door prep (2-1/8" hole, 7/8" latch hole) or fits 161 door prep (2-1/8" hole, 1" latch hole).



LG2400 Series Strikes

- CL100186 — ASA Strike, US32D
 - CL100187 — ASA Strike, US3
 - CL100415 — ASA Strike, US10B
- For metal frames. (1-1/4" x 4-7/8" x 3/32").



- CL100191 — T Strike, US32D
 - CL100189 — T Strike, US3
 - CL100420 — T Strike, US10B
- For wood frames. (1-1/8" x 2-3/4" x 3/32").



- CL100190 — F Strike, US32D
 - CL100192 — F Strike, US3
 - CL100581 — F Strike, US10B
- For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



LG2400 Series Non-Restricted Keyway

- CL100219 —
Cylinder, Schlage C, US26D
- CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder SCC keyway, optional keyways available (see price list).



- CL100268 —
IC Core Best A 6 Pin, US26D
- CL100270 —
IC Core Best A 7 Pin, US26D
- CL100269 —
IC Core Best A 6 Pin, US4
- CL100271 —
IC Core Best A 7 Pin, US4

Small format interchangeable core brass cylinder 6-pin standard, 7-pin available. Best "A" keyway standard.



LG2400 Series Tell Restricted Keyway

TELL CYLINDERS:

- CL101503 —
6 pin Tell cylinder, US26D
- CL101504 —
6 pin Tell cylinder, US4



TELL INTERCHANGEABLE CORES:

- CL101499 — 6 pin Tell IC core, US26D
- CL101500 — 6 pin Tell IC core, US4
- CL101501 — 7 pin Tell IC core, US26D
- CL101502 — 7 pin Tell IC core, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze

TELL MANUFACTURING, INC — Page 31 — 2012

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order LC2400 Series

IC KEYWAY CYLINDER*
AVAILABLE 6- or 7-PIN

- TELL —Toll
- XX —Not Specified
- 00 —Less Core
- BLK —Black Construction Core
- BU —Best U
- BQ —Best Q
- BM —Best M
- BL —Best L
- BK —Best K
- BJ —Best J
- BH —Best H
- BG —Best G
- BF —Best F
- BE —Best E
- BD —Best D
- BC —Best C
- BB —Best B
- BA —Best A

- KEYING
- OBIT —0-Bitted
 - IC —Interchangeable Core Uncombined
 - KA —Keyed Alike
 - KD —Keyed Different
 - MK —Master Key
 - CMK —Construction Master Key
 - GMK —Grand Master Key

FUNCTION

- 91 —Apartment or Exit
- 86 —Storeroom
- 86 —Storeroom IC**
- 84 —Classroom
- 84 —Classroom IC**
- 82 —Office
- 81 —Entrance
- 81 —Entrance IC**
- 80 —Communicating
- 76 —Privacy Bedroom/Bathroom
- 75 —Passage Hall/Closet
- 01 —Single Dummy

LEVER DESIGN

- STR —Sturdee
- BUC —Buckingham
- CTL —Cortland

BACKSET

- 238 —2 3/8"
- 234 —2 3/4"

TRIM TYPE

- L —Lever

GRADE

- 2

PRODUCT TYPE

- C —Cylindrical

PRODUCT FAMILY

- 4

THRU-BOLT

- R —Removeable Thru-Bolt (Optional)

FINISH

- US26D —Satin Chrome
- US3 —Bright Brass
- US10B —Oil Rubbed Bronze

STRIKE

- T —T
- F —Full Lip
- A —ASA

KEYWAY

- BA* —Best A
- SCC* —Schlage C 8-Pin
- ARA —Arrow A
- C059A1 —Corbin 59A1
- C06 —Corbin 60
- CL4 —Corbin Russwin L4
- KWI —Kwikset KW1
- RD1 —Russwin D1
- SAL —Sargent LA
- SCE —Schlage E
- SCF —Schlage F
- WRE —Welsar E
- YA8 —Yale 8
- YGA —Yale GA
- TELL —Toll

ORDERING EXAMPLE: L C 2 4 00 R CTL US26D 234 T BA* SCC* GMK

* Choose one keyway format; either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER
** IC functions in Satin Chrome (26D) only

NON-IC KEYWAY CYLINDER*
ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.



LC2600 SERIES

Standard-Duty Cylindrical Grade 2 Leversets



Cortland (CTL)



Sturdee (STR)

Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, 400,000 cycles, ANSI A117.1 accessibility (ADA) code, UL listed for 3 hour fire door
- **Chassis** Cylindrical, steel-coated w/ zinc dichronate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4" square corner faceplate, 3/4" housing, 1/2" throw (stainless steel)
- **Rose** 3-1/4" diameter
- **Thru-bolts** Removable thru-bolts standard
- **Backset** 2-3/8" or 2-3/4"
- **Strike** Square corner 1-1/4" x 4-7/8" ANSI ASA Strike
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 2"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter latch bore. Fits standard 161 door prep.
- **Warranty** 1 year limited

Optional Features

- **Chassis** Freewheeling clutch
- **Strike** **T Strike** (1-1/8" x 2-3/4"), and **F Strike** (full lip)

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)



LC2600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry/Office	81			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by turn button from inside ■ Unlocked by key from outside or rotating inside lever 	F82
Entry	82			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button from inside ■ Outside unlocked by key from outside or rotating inside lever 	F82
Classroom	84			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from each side ■ Outside lever locked or unlocked by key from outside ■ Inside lever always operates latch 	F84
Storeroom	86			<ul style="list-style-type: none"> ■ Latch operated by rotating inside lever or key in outside lever ■ Outside lever always fixed 	F86
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side ■ Outside lever locked by push button on inside ■ Unlocked by emergency release on outside, rotating inside lever, or closing door 	F76
Passage/Closet	75			<ul style="list-style-type: none"> ■ Latchbolt operated by lever from either side at all times 	F75
Single Dummy	01			<ul style="list-style-type: none"> ■ Pull lever one side ■ No mechanical operation 	



ACCESSORIES

LC2600 Series Strikes

CL100186 — ASA Strike, US32D

CL100187 — ASA Strike, US3

CL100415 — ASA Strike, US10B

For metal frames. (1-1/4" x 4-7/8" x 3/32").

CL100191 — T Strike, US32D

CL100189 — T Strike, US3

CL100420 — T Strike, US10B

For wood frames. (1-1/8" x 2-3/4" x 3/32").

CL100190 — F Strike, US32D

CL100192 — F Strike, US3

CL100581 — F Strike, US10B

For wood residential applications.
(1-5/8" x 2-1/4" x 3/32").



LC2600 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D

CL100584 —
Cylinder, Schlage C, US4

Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LC2600 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D

CL101504 —
6 pin Tell cylinder, US4



FINISHES: US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US10B=Oil Rubbed Bronze


TELL MANUFACTURING, INC — Page 35 — 2012


CORPORATE OFFICE: 18 Richard Drive, Litz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095
OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



How to Order LC2600 Series

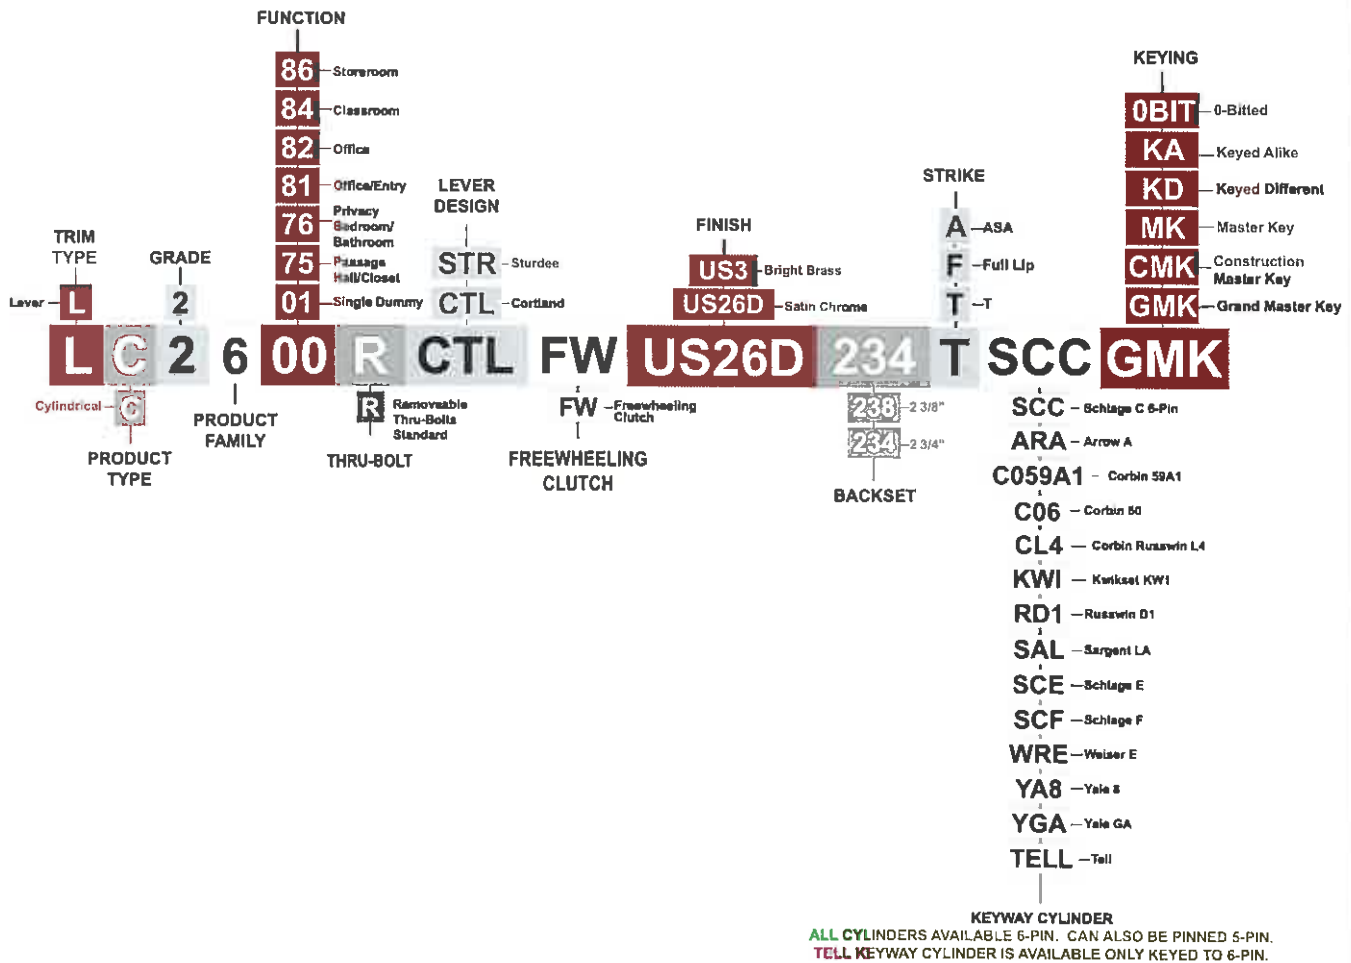



LC2700 SERIES

Standard-Duty Cylindrical Grade 2 Interconnected Leversets



Standard Features

- **Performance** Complies with ANSI A156.2, Series 4000, Grade 2, (400,000 cycles), UL listed for 3 hour fire door ADA code compliant
- **Chassis** Cylindrical, steel - coated with zinc dichromate (corrosion resistance)
- **Lever** Non-handed
- **Latch** 1-1/8" x 2-1/4", square corner faceplate, 3/4" housing diameter, 1/2" throw (stainless steel)
- **Backset** 2-3/4"
- **Strike** 2-3/4" x 1-1/8" standard T-strike. Optional strikes available.
- **Standard Cylinder** Standard cylinder Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD).
- **Keys** Two nickel silver per lock
- **Door Range** 1-3/8" to 1-3/4" door thickness
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for latch bore. Fits standard 161 door prep, 4" centers.
- **Warranty** 1 year limited

Keying Options

- **Tell Cylinder** Restricted Tell keyway cylinder available, optional. Tell keyway cylinder is available **only** keyed to 6-pin.
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
ALL CYLINDERS 6-PIN. CAN ALSO BE PINNED 5-PIN.
- **Keying Options** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)

TELL MANUFACTURING, INC — Page 37 — 2012

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com



ACCESSORIES

LC2700 Series Non-Restricted Keyway

CL100219 —
Cylinder, Schlage C, US26D
CL100584 —
Cylinder, Schlage C, US4
Standard brass 6-pin cylinder
SCC keyway, optional keyways
available (see price list).



LC2700 Series Tell Restricted Keyway

TELL CYLINDERS:

CL101503 —
6 pin Tell cylinder, US26D
CL101504 —
6 pin Tell cylinder, US4




LC2700 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entry	95			<ul style="list-style-type: none"> ▪ Latchbolt operated by lever from either side ▪ Rotating turn from inside or key from outside extends deadbolt to locked position ▪ Both deadbolt and latch bolt are retracted to unlocked position by operating inside lever 	F95



How to Order LC2700 Series

TELL PART NUMBER: CL100850

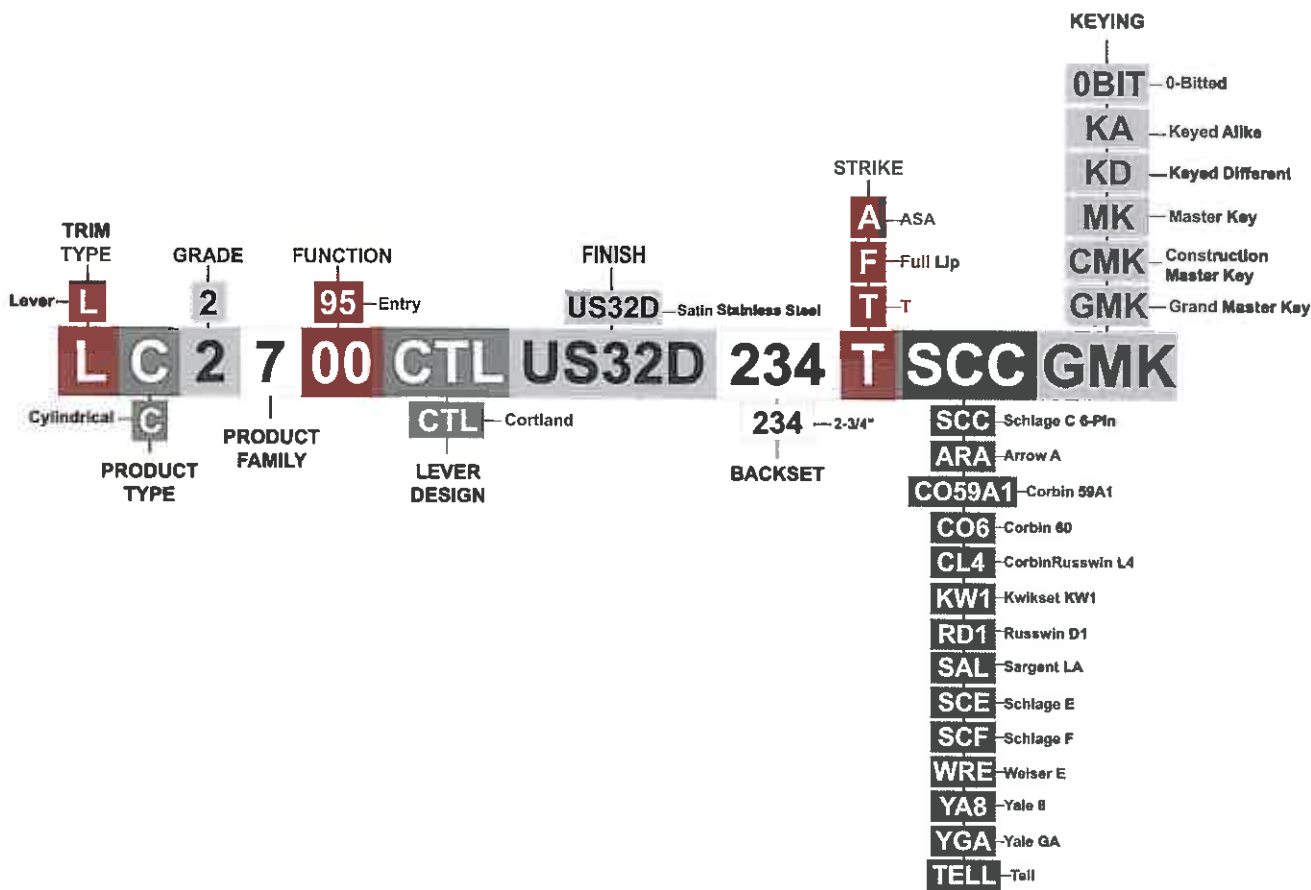

KEYWAY CYLINDER
 ALL CYLINDERS AVAILABLE 6-PIN. CAN ALSO BE PINNED 5-PIN.
 TELL KEYWAY CYLINDER IS AVAILABLE ONLY KEYED TO 6-PIN.

