




# KC3600 SERIES

## Grade 3 Cylindrical Knobsets

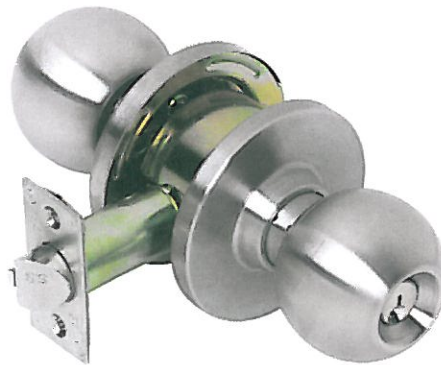

### Standard Features:

- **Function** Entrance
- **Performance** Complies with ANSI A156.2 series 4000, Grade 3
- **Chassis** Lock chassis steel, zinc dichromated for corrosion resistance.  
Cylindrical type construction, 200,000 cycles
- **Latchbolt** Latchbolt stainless steel with 1/2" throw deadlocking for lock functions.
- **Rose** 2-1/2" diameter
- **Backset** Latch backset adjustable 2-3/8" to 2-3/4"
- **Strike** **Strike Options: ASA Strike** (square corner 1-1/4" x 4-7/8" ANSI), **T Strike** (square corner 1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Door Range** Door thickness 1-3/8" to 1-3/4". Non-handed.
- **Door Preparation** Fits standard 160/161 door prep
- **Cylinder** Schlage (SCC) - 5-pin solid brass, C keyway, keyed different (KD)
- **Keys** Keys include two nickel silver per lock cylinder
- **Warranty** 1 year limited


### Optional Features:

- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)



# LC3600 SERIES

## Grade 3 Cylindrical Leversets

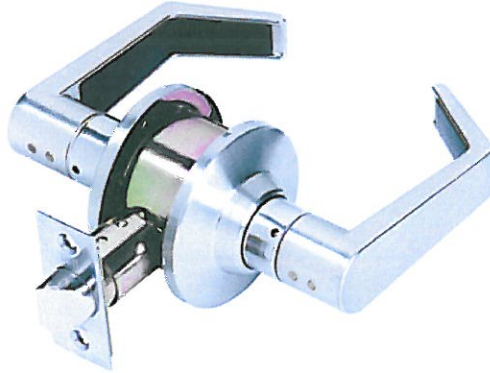

### Standard Features:

- **Functions** Passage, privacy, dummy functions available lever x lever. **Entry function available ball x lever.** (Lever x lever entry available in commercial Grade 2.)
- **Performance** Complies with ANSI A156.2 series 4000, Grade 3. Passage and privacy functions meet ANSI A117.1 accessibility (ADA) code; entry function does not.
- **Chassis** Lock chassis steel, zinc dichromated for corrosion resistance. Cylindrical type construction, 200,000 cycles
- **Latchbolt** Latchbolt stainless steel with 1/2" throw, deadlocking for lock functions
- **Rose** 2-1/2" diameter
- **Backset** Latch backset adjustable 2-3/8" to 2-3/4"
- **Strike** **Strike Options: ASA Strike** (square corner 1-1/4" x 4-7/8" ANSI), **T Strike** (square corner 1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Door Range** Door thickness 1-3/8" to 1-3/4". Non-handed.
- **Door Preparation** Fits standard 160/161 door prep.
- **Keys** Keys include two nickel silver per lock cylinder
- **Cylinder** Schlage (SCC) - 5-pin solid brass, C keyway, keyed different (KD)
- **Warranty** 1 year limited

### Optional Features:

- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)



## KC3600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance	81			<ul style="list-style-type: none"> <li>■ Latchbolt operated by knob from either side</li> <li>■ Outside knob locked by push button from inside</li> <li>■ Unlocked by key from outside or rotating inside knob</li> <li>■ When outside knob locked by push and turn button from inside, key from outside or rotating inside knob retracts latch, does not unlock outside knob</li> </ul>	F81

## LC3600 Series Function Chart

FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Entrance, Lever X Knob	81			<ul style="list-style-type: none"> <li>■ Latchbolt operated by outside knob/inside lever from either side</li> <li>■ Outside knob locked by push button from inside lever</li> <li>■ Outside unlocked by key from outside knob or rotating inside lever</li> </ul>	F82
Passage Hall/Closet	75			<ul style="list-style-type: none"> <li>■ Latchbolt operated by lever from either side at all times</li> </ul>	F75
Privacy Bedroom/Bathroom	76			<ul style="list-style-type: none"> <li>■ Latchbolt operated by lever from either side</li> <li>■ Outside lever locked by push button on inside</li> <li>■ Unlocked by emergency release on outside, rotating inside lever, or closing door</li> </ul>	F76



## ACCESSORIES

### KC3600 / LC3600 Series Latches

**RL100052** —  
2-3/4" / 2-3/8" UNG ADJ DI latch

**RL100053** —  
2-3/4" / 2-3/8" UNG ADJ Kickoff  
(for Privacy) DI

**RL100051** —  
2-3/4" / 2-3/8" UNG ADJ DI latch  
Drive-in latch, used where face plate not required. Backset adjustable 2-3/8" to 2-3/4", 1/2" throw, 1" diameter body.



**RL100032**—  
2-3/4" / 2-3/8" Unguarded, US32D

**RL100255**—  
2-3/4" / 2-3/8" Unguarded, US3  
UL listed latch bolt with non-deadlatching function. 1/2" throw. Backset adjustable 2-3/8" to 2-3/4".



**RL100258**—  
2-3/4" / 2-3/8" Guarded, US32D

**RL100135**—  
2-3/4" / 2-3/8" Guarded, US3  
UL listed latchbolt with deadlatching function. 1/2" throw. Backset adjustable 2-3/8" and 2-3/4".



### KC3600 / LC3600 Series Strikes

**CL100186** — ASA Strike, US32D

**CL100187** — ASA Strike, US3

**CL100415** — ASA Strike, US10B  
For metal frames. (1-1/4" x 4-7/8" x 3/32").



**CL100191** — T Strike, US32D

**CL100189** — T Strike, US3


**CL100420** — T Strike, US10B  
For wood frames. (1-1/8" x 2-3/4" x 3/32").



**CL100190** — F Strike, US32D

**CL100192** — F Strike, US3


**CL100581** — F Strike, US10B  
For wood residential applications. (1-5/8" x 2-1/4" x 3/32").



**FINISHES:** US32D=Satin Stainless Steel, US3=Bright Brass, US26D=Satin Chrome, US4=Satin Brass, US10B=Oil Rubbed Bronze  
**NOTES:** ADJ=Adjustable, UNG=Unguarded, DI=Drive-In Latch, KO=Kickoff



## How To Order KC3600 Series

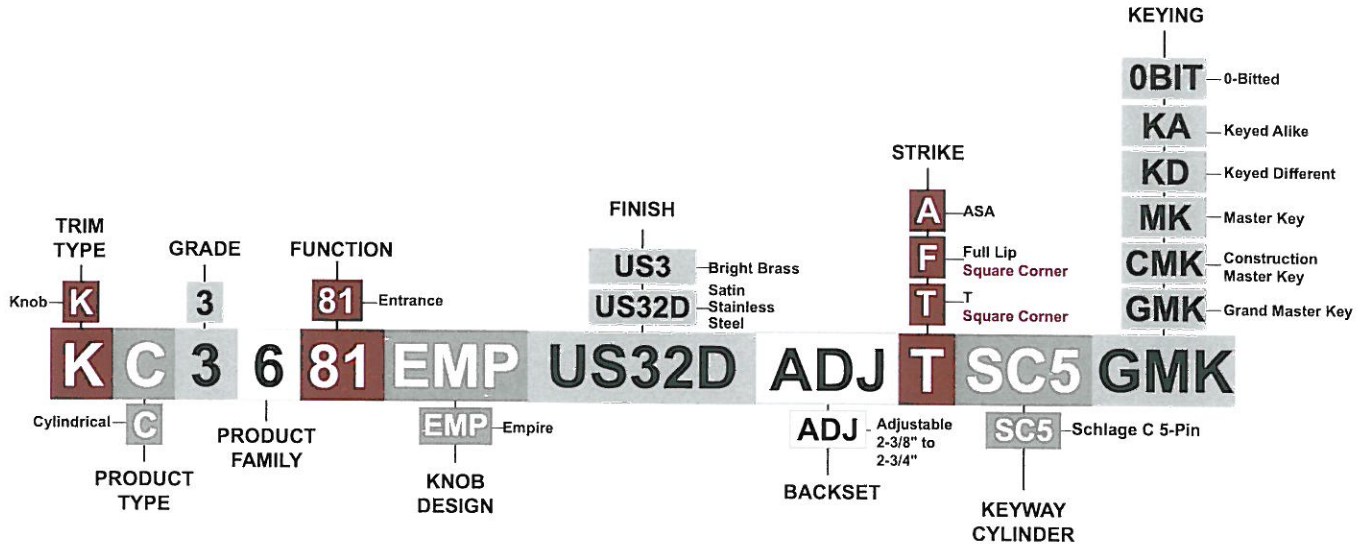

## How To Order LC3600 Series

