




LC3600 SERIES

Grade 3 Cylindrical Leversets

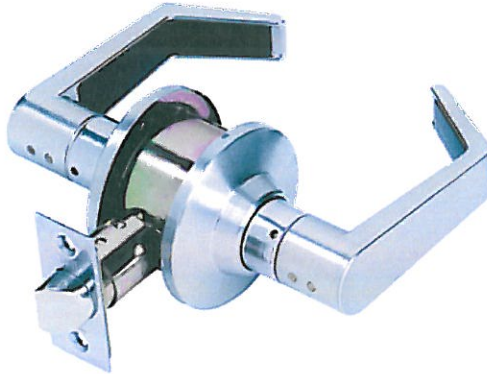

Standard Features:

- **Functions** Passage, privacy, dummy functions available lever x lever. **Entry function available ball x lever.** (Lever x lever entry available in commercial Grade 2.)
- **Performance** Complies with ANSI A156.2 series 4000, Grade 3. Passage and privacy functions meet ANSI A117.1 accessibility (ADA) code; entry function does not.
- **Chassis** Lock chassis steel, zinc dichromated for corrosion resistance. Cylindrical type construction, 200,000 cycles
- **Latchbolt** Latchbolt stainless steel with 1/2" throw, deadlocking for lock functions
- **Rose** 2-1/2" diameter
- **Backset** Latch backset adjustable 2-3/8" to 2-3/4"
- **Strike** **Strike Options: ASA Strike** (square corner 1-1/4" x 4-7/8" ANSI), **T Strike** (square corner 1-1/8" x 2-3/4"), and **F Strike** (full lip)
- **Door Range** Door thickness 1-3/8" to 1-3/4". Non-handed.
- **Door Preparation** Fits standard 160/161 door prep.
- **Keys** Keys include two nickel silver per lock cylinder
- **Cylinder** Schlage (SCC) - 5-pin solid brass, C keyway, keyed different (KD)
- **Warranty** 1 year limited

Optional Features:

- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), 0-bitted (0BIT)