




DB2000 SERIES

Standard-Duty Tubular Grade 2 Deadbolts

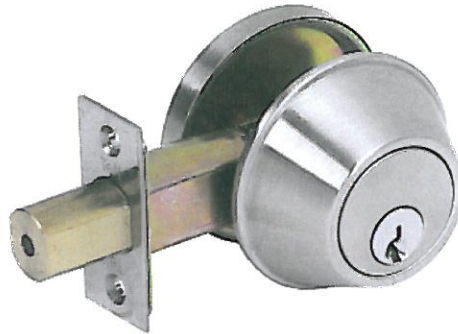

Standard Features

- **Performance** Complies with ANSI A156.5, Grade 2, 150,000 cycles
- **Chassis** Tubular, steel
- **Deadbolt** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1" throw, roller bar (added security for hacksaw or reciprocating blade cutting)
- **Backset** Adjustable 2-3/8" to 2-3/4". 2-1/4" x 1" faceplate standard. Drive-In optional.
- **Strike** 1-1/8" x 2-3/4", square corner faceplate
- **Door Range** 1-3/8" - 1-3/4"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
- **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keys** Two nickel silver per lock cylinder
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
- **Warranty** 1 year limited

Optional Features

- **Cylinder** Other manufacturers including small format interchangeable cores
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)