


Light-Duty Grade 3 Tubular

LT3500 SERIES

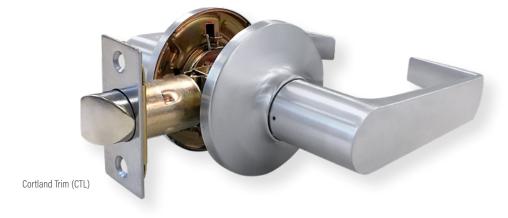

FEAT	URES

Performance • Complies with ANSI A156.2, Series 4000, Grade 3

• Meets ANSI A1171 American Disabilities Act (ADA) accessibility code

Grade 3 light duty

• 200,000 cycles

Chassis • Tubular

• Steel - coated with zinc dichromate (corrosion resistance)

Lever • Non-handed, solid cast

· Cortland or Niagara style

Latch • 1" x 2 ¼", square corner faceplate

• 1" housing diameter (stainless steel)

• 1/2" throw

Rose • 2½" diameter

Backset • Adjustable 2 3/4" or 2 3/8"

Strike • Standard: 2-3/4" x 1-1/8" standard T-strike

Optional strikes available

Cylinder • SCC - C keyway

• 5-pin solid brass

Keyed different (KD)

Keys • Two nickel silver per lock cylinder

Door Thickness • 13/8" - 2"

Door Preparation • 2 1/8" diameter

• 1" diameter for latchbolt

Warranty • Limited lifetime

LT3500 SERIES

OPTIONS


KEYING OPTIONS Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA),

interchangeable core uncombinated (IC), 0-bitted (0BIT)

AVAILABLE FUNCTIONS Entry 81

Privacy Bed/Bath 76 Passage Hall/Closet 75

LEVER STYLES





Cortland

Niagara

TELL FINISHES







US15 Satin Nickle

US26D Satin Chrome

US19 Matte Black

