




DB2000 SERIES

Standard-Duty Tubular Grade 2 Deadbolts

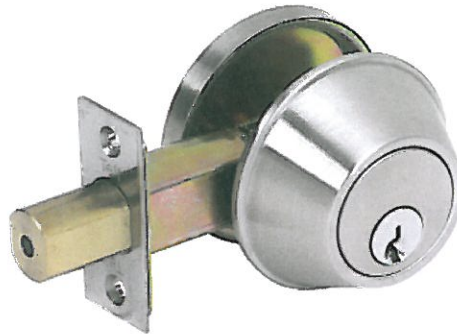

Standard Features

- **Performance** Complies with ANSI A156.5, Grade 2, 150,000 cycles
 - **Chassis** Tubular, steel
 - **Deadbolt** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1" throw, roller bar (added security for hacksaw or reciprocating blade cutting)
 - **Backset** Adjustable 2-3/8" to 2-3/4". 2-1/4" x 1" faceplate standard. Drive-In optional.
 - **Strike** 1-1/8" x 2-3/4", square corner faceplate
 - **Door Range** 1-3/8" - 1-3/4"
 - **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
 - **Keys** Two nickel silver per lock cylinder
 - **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
 - **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
 - **Keys** Two nickel silver per lock cylinder
 - **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
 - **Warranty** 1 year limited
- ### Optional Features
- **Cylinder** Other manufacturers including small format interchangeable cores
 - **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (0BIT)

TELL MANUFACTURING, INC — Page 47 — 2011

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com