




DB2000 SERIES

Standard-Duty Tubular Grade 2 Deadbolts

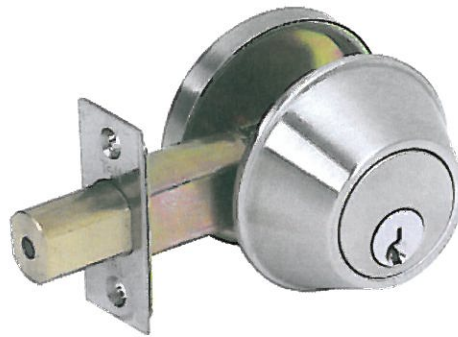

Standard Features

- **Performance** Complies with ANSI A156.5, Grade 2, 150,000 cycles
- **Chassis** Tubular, steel
- **Deadbolt** 1" x 2-1/4", square corner faceplate, 1" housing diameter (stainless steel), 1" throw, roller bar (added security for hacksaw or reciprocating blade cutting)
- **Backset** Adjustable 2-3/8" to 2-3/4". 2-1/4" x 1" faceplate standard. Drive-In optional.
- **Strike** 1-1/8" x 2-3/4", square corner faceplate
- **Door Range** 1-3/8" - 1-3/4"
- **Door Preparation** 2-1/8" diameter for bore, 1" diameter for bolt. Fits standard 161 door prep.
- **Cylinder** Schlage (SCC) - 6-pin solid brass, C keyway, keyed different (KD)
- **Other Cylinder Options** Arrow A (ARA), Corbin 59A1 (C059A1), Corbin 60 (C06), Corbin Russwin L4 (CL4), Kwikset (KW1), Russwin D1 (RD1), Sargent LA (SAL), Schlage E (SCE), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8), Yale GA (YGA)
- **Keys** Two nickel silver per lock cylinder
- **IC Keyway Cylinder** Best A (BA), Best B (BB), Best C (BC), Best D (BD), Best E (BE), Best F (BF), Best G (BG), Best H (BH), Best J (BJ), Best K (BK), Best L (BL), Best M (BM), Best Q (BQ), Best U (BU), Black construction core (BLK), Less core (00), Not specified (XX)
AVAILABLE 6- OR 7-PIN
- **Warranty** 1 year limited

Optional Features

- **Cylinder** Other manufacturers including small format interchangeable cores
- **Keying** Grand master key (GMK), construction master key (CMK), master key (MK), keyed different (KD), keyed alike (KA), interchangeable core uncombined (IC), 0-bitted (OBIT)

TELL MANUFACTURING, INC. — Page 47 — 2012

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095
OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA
WEBSITE: www.tellmfg.com



DB2000 Series Function Chart


FUNCTION	FUNCTION NO.	OUTSIDE	INSIDE	FUNCTION DESCRIPTION	ANSI NO.
Double Cylinder	41			Deadbolt operated by key outside, thumb turn inside	E0142
Single Cylinder	51			Deadbolt operated by key outside, key inside	E0152
Communicating	25			Deadbolt operated by inside thumbturn only	E0162
Communicating with Backplate	K25			Deadbolt operated by inside thumbturn only with backplate	E0162

DB2000 Series Accessory

How to Order DB2000 Series

CL100177

Adjustable drive-in latch.

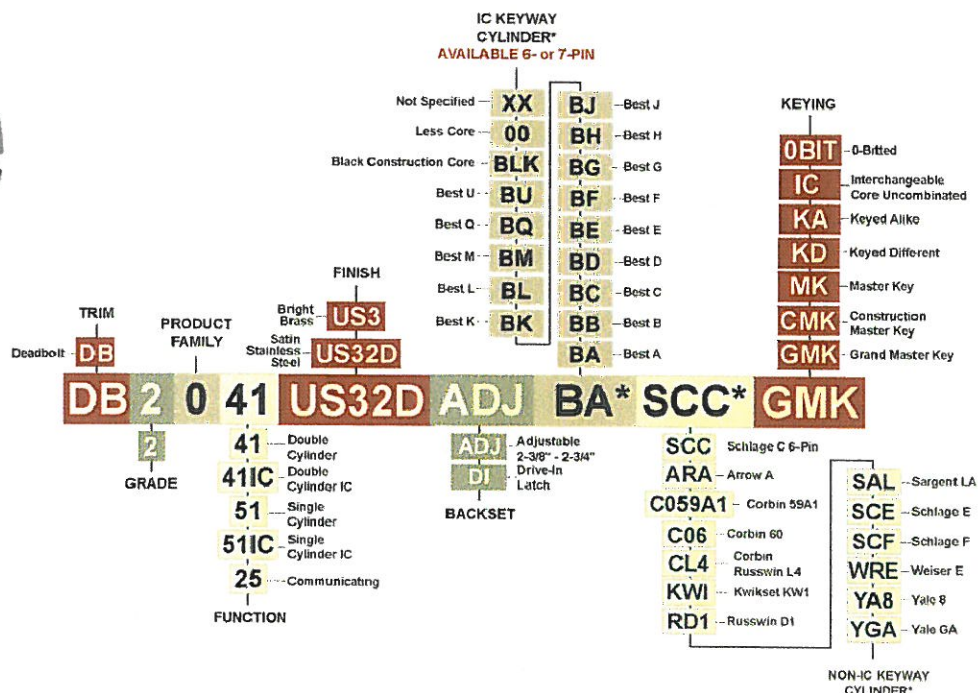

*Choose one keyway format; either IC KEYWAY CYLINDER or Non-IC KEYWAY CYLINDER

TELL MANUFACTURING, INC — Page 48 — 2012

CORPORATE OFFICE: 18 Richard Drive, Lititz, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095
 OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA
 WEBSITE: www.tellmfg.com